ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY

O.M.B. No 3067-0077 Expires May 31, 1993

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to NATIONAL FLOOD INSURANCE PROGRAM ovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to stermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages. SECTION A PROPERTY INFORMATION BUILDING OWNER'S NAME FOR INSURANCE COMPANY USE DORIS IRENE MUSGROVE BREUNING STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER POLICY NUMBER OTHER DESCRIPTION (Lot and Block Numbers, etc.) COMPANY NAIC NUMBER 46, BELLEVUE ESTATES ISLAND FIRST ADDITION - PLAT BOOK 46, PAGE 72 CITY BELLEAIR BEACH. STATE ZIP CODE SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION **FLORIDA** 34630 34/ Provide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 125089 6. BASE FLOOD ELEVATION (in AO Zones, use depth) 0002 7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): X NGVD '29 Other (describe on back) B 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: _____ feet NGVD (or other FIRM datum-see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 1 | 1 | 7 . 9 feet NGVD (or other FIRM datum-see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of ______ feet NGVD (or other FIRM datum-see Section B, Item 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is feet above or below \square (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is feet above or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance?

Yes

No

Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: X NGVD '29 \(\text{Other (describe} \) under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion LElevation reference mark used appears on FIRM: Yes X No (See Instructions on Page 4) The reference level elevation is based on: 💢 actual construction 🔲 construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate The elevation of the lowest grade immediately adjacent to the building is: 17.7 feet NGVD (or other FIRM datum-see SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 he "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest loor" as defined by the ordinance is: ______ feet NGVD (or other FIRM datum-see Section B, Item 7).

SECTION E CERTIFICATION


1. まままによべては

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation iformation when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section-C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

ERTIFIER'S NAME		LICENSE NUMBER (or Affix Seal)				*****	
, L/	AUREN R. PENNY		9		#493	1 " / : : : :	
TITLE			IPANY NAME				
PRESIDENT		L.R. PENNY AND	ASSOCIATES, INC				
ADDRESS 11922 SEMI	NOLE BOULEVA	RD SUITE #150	LARGO			STATE FLA.	ZIP 34648
SIGNATURE	ruren R.	Penny	DATE 1-31-92		PHONE	398-4360	
					The state of the s	000 1000	
Copies should be	made of this Certi	ficate for: 1) communit	y official, 2) insurance		npany, and		ner.
Copies should be	made of this Certi	ficate for: 1) communit	y official, 2) insurance		npany, and		ner.
4	made of this Certi	ficate for: 1) communit			npany, and	3) building own	ner.
4	made of this Certi			agent/con		3) building own	ner.

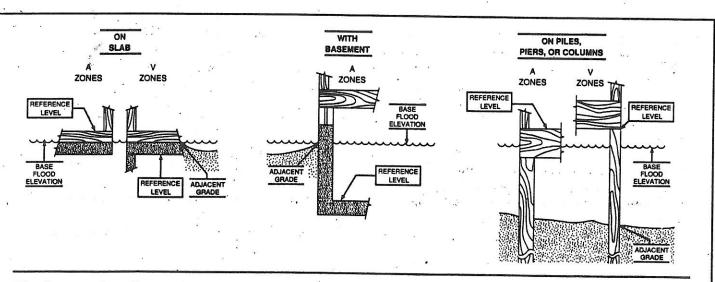

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.